

Robert J. Huston, *Chairman*
R. B. "Ralph" Marquez, *Commissioner*
John M. Baker, *Commissioner*
Jeffrey A. Saitas, *Executive Director*



RECEIVED
JUL 20 2000
COUNTY ENGINEER

TEXAS NATURAL RESOURCE CONSERVATION COMMISSION

Protecting Texas by Reducing and Preventing Pollution

July 19, 2000

TNRCC
Conver.

Mr. Tom Singley & Ms. Michelle Lee
Martin Marietta Materials
17910 IH 10 West
San Antonio, TX 78257

Re: Edwards Aquifer, Comal County
NAME OF PROJECT: Martin Marietta Materials - Hunter Quarry; Located on west side of FM 1102, approximately 2,000 feet north of intersection with FM 306; New Braunfels, Texas
TYPE OF PLAN: Request for Approval of a Water Pollution Abatement Plan (WPAP); 30 Texas Administrative Code (TAC) Chapter 213 Edwards Aquifer
Edwards Aquifer Protection Program File No. 1486.00

Dear Mr. Singley & Ms. Lee:

The Texas Natural Resource Conservation Commission (TNRCC) has completed its review of the WPAP application for the referenced project submitted to the San Antonio Regional Office by Gary Nicolls, P.E. of Westward Environmental, Inc. on behalf of Martin Marietta Materials, on May 3, 2000. Final review of the WPAP submittal was completed after additional material was received on June 9, 2000, and July 13, 2000. As presented to the TNRCC, the Temporary and Permanent Best Management Practices (BMPs) and construction plans were prepared by a Texas Licensed Professional Engineer to be in general compliance with the requirements of 30 TAC Chapter 213. These planning materials were sealed, signed, and dated by a Texas Licensed Professional Engineer. Therefore, based on the engineer's concurrence of compliance, the planning materials for construction of the proposed project and pollution abatement measures are hereby approved subject to applicable state rules and the conditions in this letter. The applicant or a person affected may file with the chief clerk a motion for reconsideration of the executive director's final action on this Edwards Aquifer protection plan, modification to a plan, or exception. A motion for reconsideration must be filed no later than 20 days after the date of this approval letter. *This approval expires two (2) years from the date of this letter unless, prior to the expiration date, more than 10% of the construction has commenced on the project or an extension of time has been requested.*

PROJECT DESCRIPTION

The proposed commercial project will have an area of approximately 753 acres on the Recharge Zone, and four adjacent tracts (82 acres, 71 acres, 81 acres and 205 acres) located on the Transition Zone.

REPLY TO: REGION 13 • 140 HEIMER RD., STE. 360 • SAN ANTONIO, TEXAS 78232-5042 • 210/490-3096 • FAX 210/545-4329

P.O. Box 13087 • Austin, Texas 78711-3087 • 512/239-1000 • Internet address: www.tnrcc.state.tx.us

printed on recycled paper using soy-based ink

Mr. Tom Singley & Ms. Michelle Lee
July 19, 2000
Page 2

The proposed commercial project will have an area of approximately 753 acres and will have the following parameters:

- The proposed project is limited to the excavation and initial crushing of limestone.
- All quarried limestone will be transported by an overland conveyor and bridges off the Recharge Zone and onto the Transition Zone. All secondary crushing and screening will take place on the Transition Zone.
- There will be no impervious cover associated with this project.
- There will be no hazardous material or hydrocarbon storage on the project site.
- Portable toilets will be provided, and all wastewater will be collected by a pump truck once or twice per week, as needed.
- Under current Edwards Rules, secondary crushing and storage on the Transition Zone is not regulated by 30 TAC 213. An aboveground storage tank (AST) facility will be placed on the Transition Zone and be reviewed separately from the WPAP application approved by this letter.

PERMANENT POLLUTION ABATEMENT MEASURES

The excavation is expected to continue for 25 - 30 years. During the active life of the quarry, surface stream contamination will be minimized by the use of rock berms placed in the areas where stream runoff occurs and downgradient of the cleared areas to reduce erosion and runoff. Earthen berms and silt fences will also be constructed and maintained around the perimeter of the project site. After quarrying is complete, all upgradient and on-site stormwater will be retained in the pit and will not leave the site.

All quarried limestone will be transported by an overland conveyor and bridges off the Recharge Zone and onto the Transition Zone. All secondary crushing and screening will take place on the Transition Zone. The only water to be used on the quarry site will be for dust suppression. All washing of crushed rock will occur off of the Recharge Zone.

GEOLOGY

According to the geologic assessment included with the submittal, there are 55 geologic or manmade features located on the project site. Three features are sensitive, 44 are possibly sensitive, and 8 are not sensitive. The San Antonio Regional Office site inspection of June 2, 2000, revealed that the site is as described by the geologic assessment and no additional geologic or manmade features were observed.

SPECIAL CONDITIONS

Prior to commencing commercial operation of the project, provide the TNRCC with a copy of a contract or agreement with the TNRCC licensed waste hauler who will be providing wastewater disposal.

STANDARD CONDITIONS

1. Pursuant to §26.136 of the Texas Water Code, any violations of the requirements in 30 TAC Chapter 213 may result in administrative penalties.

Prior to Commencement of Construction:

2. Within 60 days of receiving written approval of an Edwards Aquifer protection plan, the applicant must submit to the San Antonio Regional Office, proof of recordation of notice in the county deed records, with the volume and page number(s) of the county deed records of the county in which the property is located. A description of the property boundaries, covered by the Edwards Aquifer protection plan, shall be included in the deed recordation in the county deed records. A suggested form (Deed Recordation Affidavit, TNRCC-0625) that you may use to deed record the approved WPAP is enclosed.
3. All contractors conducting regulated activities at the referenced project location shall be provided a copy of this notice of approval. At least one complete copy of the approved WPAP and this notice of approval shall be maintained at the project location until all regulated activities are completed.
4. Modification to the activities described in the referenced WPAP application following the date of approval may require the submittal of a plan to modify this approval, including the payment of appropriate fees and all information necessary for its review and approval prior to initiating construction of the modifications.
5. The applicant must provide written notification of intent to commence construction, replacement, or rehabilitation of the referenced project. Notification must be submitted to the San Antonio Regional Office no later than 48 hours prior to commencement of the regulated activity. Written notification must include the date on which the regulated activity will commence, the name of the approved plan and file number for the regulated activity, and the name of the prime contractor with the name and telephone number of the contact person. The executive director will use the notification to determine if the approved plan is eligible for an extension of an approved plan.
6. Temporary erosion and sedimentation (E&S) controls, i.e., silt fences, rock berms, stabilized construction entrances, or other controls described in the approved WPAP, must be installed prior to construction and maintained during construction. Temporary E&S controls may be removed when vegetation is established and the construction area is stabilized. If a water quality pond is proposed, it shall be used as a sedimentation basin during construction. The TNRCC may monitor stormwater discharges from the site to evaluate the adequacy of temporary E&S control measures. Additional controls may be necessary if excessive solids are being discharged from the site.
7. Abandoned injection wells must be closed under the requirements of 30 TAC Chapter 331 (relating to Underground Injection Control).

8. All borings with depths greater than or equal to 20 feet must be plugged with a non-shrink grout from the bottom of the hole to within three (3) feet of the surface. The remainder of the hole must be backfilled with cuttings from the boring. All borings less than 20 feet must be backfilled with cuttings from the boring. All borings must be backfilled or plugged within four (4) days of completion of the drilling operation. Voids may be filled with gravel.

During Construction:

9. During the course of regulated activities related to this project, the applicant or his agent shall comply with all applicable provisions of 30 TAC Chapter 213, Edwards Aquifer. The applicant shall remain responsible for the provisions and conditions of this approval until such responsibility is legally transferred to another person or entity.
10. If any sensitive feature is discovered during construction, all regulated activities near the feature must be suspended immediately. The applicant or his agent must immediately notify the San Antonio Office of the discovery of the feature. Regulated activities near the feature may not proceed until the executive director has reviewed and approved the methods proposed to protect the feature and the aquifer from potentially adverse impacts to water quality. The plan must be sealed, signed, and dated by a Texas Licensed Professional Engineer.
11. Two wells exist on the site. All identified abandoned water wells, including injection, dewatering, and monitoring wells must be plugged pursuant to requirements of the Texas Department of Licensing and Regulation under Title 16 TAC Chapter 76 (relating to Licensing and Regulation of Water Well Drillers and Water Well Pump Installers) and all other locally applicable rules, as appropriate. If any abandoned wells (including water, injection (injection well referenced in Item 7), dewatering, and monitoring well) are encountered during construction, they must be plugged pursuant to requirements of the Texas Department of Licensing and Regulation (16 TAC Chapter 76) and all other locally applicable rules, as appropriate.
12. If sediment escapes the construction site, the sediment must be removed at a frequency sufficient to minimize offsite impacts to water quality (e.g., fugitive sediment in street being washed into surface streams or sensitive features by the next rain). Sediment must be removed from sediment traps or sedimentation ponds not later than when design capacity has been reduced by 50%. Litter, construction debris, and construction chemicals exposed to stormwater shall be prevented from becoming a pollutant source for stormwater discharges (e.g., screening outfalls, picked up daily).
13. The following records shall be maintained and made available to the executive director upon request: the dates when major grading activities occur, the dates when construction activities temporarily or permanently cease on a portion of the site, and the dates when stabilization measures are initiated.

14. Stabilization measures shall be initiated as soon as practicable in portions of the site where construction activities have temporarily or permanently ceased, and construction activities will not resume within 21 days. When the initiation of stabilization measures by the 14th day is precluded by weather conditions, stabilization measures shall be initiated as soon as practicable.
15. To the maximum extent practicable, BMPs and measures must maintain flow to naturally-occurring sensitive features identified in either the geologic assessment, executive director review, or during excavation, blasting, or construction. The temporary sealing of a naturally-occurring sensitive feature which accepts recharge to the Edwards Aquifer as a temporary pollution abatement measure during active construction should be avoided. A request to temporarily seal the feature must include a justification that no reasonable and practicable alternative exists. The request will be evaluated by the executive director on a case-by-case basis.

After Completion of Construction:

16. Owners of permanent BMPs and measures must insure that the BMPs and measures are constructed and function as designed. A Texas Licensed Professional Engineer must certify in writing that the permanent BMPs or measures were constructed as designed. The certification letter must be submitted to the San Antonio Regional Office within 30 days of site completion.
17. The applicant shall be responsible for maintaining the permanent BMPs after construction until such time as the maintenance obligation is either assumed in writing by another entity having ownership or control of the property (such as without limitation, an owner's association, a new property owner or lessee, a district, or municipality) or the ownership of the property is transferred to the entity. Such entity shall then be responsible for maintenance until another entity assumes such obligations in writing or ownership is transferred. A copy of the transfer of responsibility must be filed with the executive director through the San Antonio Regional Office within 30 days of the transfer. A copy of the transfer form (TNRCC-10263) is enclosed.
18. Upon legal transfer of this property, the new owner(s) is required to comply with all terms of the approved Edwards Aquifer protection plan. If the new owner intends to commence any new regulated activity on the site, a new Edwards Aquifer protection plan that specifically addresses the new activity must be submitted to the executive director. Approval of the plan for the new regulated activity by the executive director is required prior to commencement of the new regulated activity.
19. An Edwards Aquifer protection plan approval or extension will expire and no extension will be granted if more than 50% of the total construction has not been completed within ten years from the initial approval of a plan. A new Edwards Aquifer protection plan must be submitted to the San Antonio Regional Office with the appropriate fees for review and approval by the executive director prior to commencing any additional regulated activities.

Mr. Tom Singley & Ms. Michelle Lee


July 19, 2000

Page 6

20. At project locations where construction is initiated and abandoned, or not completed, the site shall be returned to a condition such that the aquifer is protected from potential contamination.

If you have any questions or require additional information, please contact John Mauser of the Edwards Aquifer Protection Program of the San Antonio Regional Office at 210/403-4024.

Sincerely,

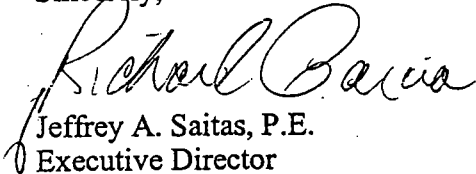

Jeffrey A. Saitas, P.E.
Executive Director

Texas Natural Resource Conservation Commission

JAS/JKM/eg

Enclosure: Deed Recordation Affidavit, Form TNRCC-0625
Change in Responsibility for Maintenance or Permanent BMPs-Form TNRCC-10263

cc: Mr. Gary Nicholls, P.E., Westward Environmental, Inc.
Mr. Harry Bennett, City of New Braunfels
Mr. John Bohuslav, TXDOT San Antonio District
Mr. Tom Hornseth, Comal County
Mr. Greg Ellis, Edwards Aquifer Authority
TNRCC Field Operations, Austin